



ADVICE NOTE

AN04:

STABILITY OF GARDEN FENCES CLOSE TO BOARD MAINTAINED WATERCOURSES

REVISION RECORD				
Version	Date	Description	Originator	Checked
	26.03.2012	DRAFT	MM	--
	24.05.2012	BOARD APPROVED		
	08.10.2013	LOGO ADDED & AMENDED CONTACT DETAILS	LSQ	
	17.01.2018	AMENDED ADDRESS AND CONTACT DETAILS	LSQ	
4	27.07.2018	AMENDMENTS	LSQ	DJS

The Board reserves the right to update or change this living document at any time without notice.

INTRODUCTION

The Board's Byelaw No. 17 (d) states:

No person shall without the previous consent of the Board -

(d) erect or construct or cause or permit to be erected or constructed any fence, post, pylon, wall, wharf, jetty, pier, quay, bridge, loading stage, piling, groyne, revetment or any other building or structure whatsoever in, over or across any watercourse or in or on any bank thereof;


Fences are often erected adjacent to a Board maintained watercourse without consent. Unless they obstruct the Board in the normal course of its maintenance work they may go unnoticed. If noticed the Board has a range of options, from taking no action through to enforcing the removal of the fence.

Regardless of the consent situation the Board accepts no liability for the fence or its stability.

REASONS WHY FENCES MOVE

Soil mechanics is a complex subject. The stability of the ground and the support it gives depends on soil type (sand / silt / clay), the wetness and the overburden.

However a sloping bank (or batter) does not provide the same support as level ground. In particular, the horizontal support to fence posts is approximately one third of that given by level land.

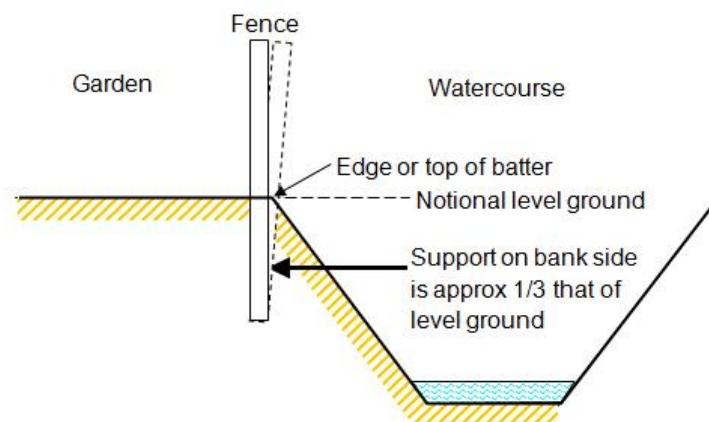


Hence over time, fence posts (telegraph poles etc) will tilt towards the watercourse.


ADVICE

The Board recommends that garden fence lines are set back from the edge of the bank of the watercourse by at least 1.0 metre.

Where this is not possible fence posts should be double width (150-200mm wide) and installed to a depth of at least 1.0 metre below ground level; the deeper the better. Double width can be achieved by connecting two fence posts together:

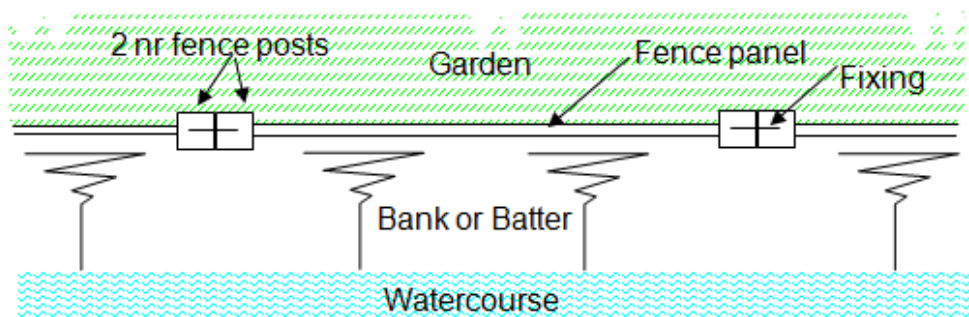

Sloping paved areas to the edge of a bank can cause further problems - surface runoff can wash or erode the bank away. Paved areas should be sloped back from the bank edge and drained to soakaways or other positive drainage systems. Please note any piped outfall into the watercourse will require the Board's consent.

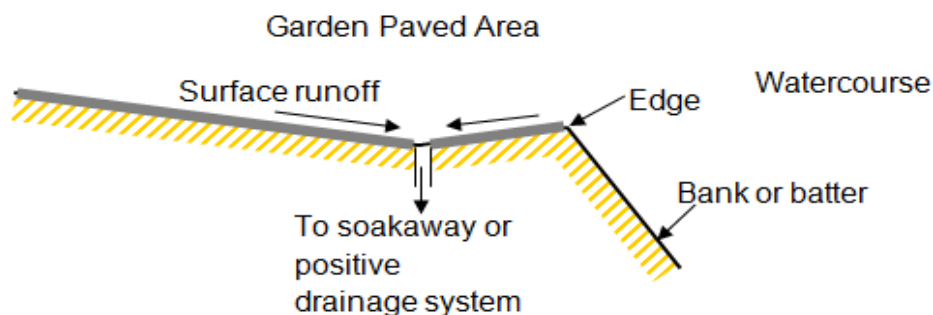

The Board does not guarantee that the above advice will stop all movement. If you are particularly concerned you should engage a suitably qualified engineer to look into the matter.

The advice given in this document does not absolve applicants of the need to gain the Board's consent prior to the erection of new or replacement fences.

FURTHER GUIDANCE

The Board has the following documents available:

- Consent Application Form
- Trent Valley Internal Drainage Board's Byelaws
- Planning and Byelaw Policy

The Board has also produced a series of other advice notes including:

- AN01: Buildings, Structures, Planting and Fencing
- AN02: Culverts and Bridges
- AN03: Environmental Considerations
- AN05: Service Crossings
- AN06: Surface Water

The above documents are available from the Board's office during normal working hours or alternatively, can be downloaded electronically from <http://www.wmc-idbs.org.uk/TVIDB/Services/byelaws-and-planning.aspx>

If you would like to discuss any of the information in this document or associated advice notes please do not hesitate to contact the Newark Office, details provided below.

**TRENT VALLEY INTERNAL DRAINAGE BOARD
BEACON HILL BUSINESS PARK,
CAFFERATA WAY,
NEWARK,
NOTTINGHAMSHIRE.
NG24 2TN.**

Telephone: 01636 704371

Email: planning@tvidb.co.uk